

# SEKONIC

## Basic & Tradition




It's New

# Studio Deluxe III L-398A

Studio Deluxe III L-398A

Incident Reflected (30°) Removable Ambient light

The industry standard for incident and ambient light. Loved by many photographers for a long time.

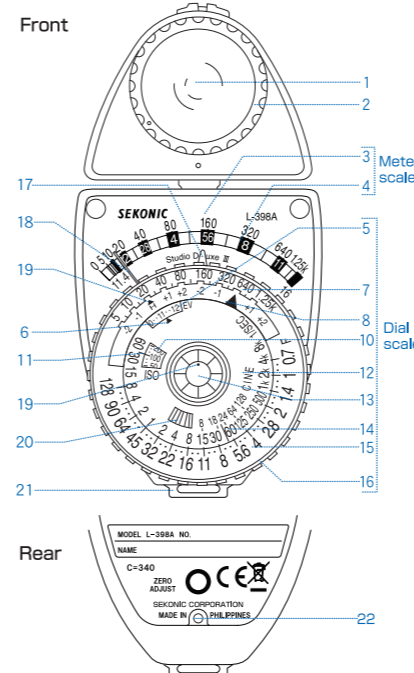

- 1. Lumisphere
- 2. Light sensor
- 3. Footcandle scale
- 4. Aperture value(for direct reading)
- 5. EV scale
- 6. EV mark
- 7. Dial scale
- 8. Scale mark
- 9. "H" mark
- 10. ISO scale
- 11. ISO mark
- 12. Cine scale
- 13. Stopper button
- 14. Shutter speed scale
- 15. Aperture scale
- 16. Dial ring
- 17. Memo pointer
- 18. Needle
- 19. Stopper button mark
- 20. Film sensitivity selector knob
- 21. Strap eyelet
- 22. Zero adjust screw

### Features


- Combination of aperture and shutter speed can be seen at a glance.
- Amorphous photocell eliminates need for batteries.
- Swivel head and needle lock facilitate easy and accurate reading.



### Other functions

- Needle unlock for continuous reading
- EV display
- Memory pointer retains prior reading
- Cine speed setting (8 to 128 f/s)

### L-398A Operation

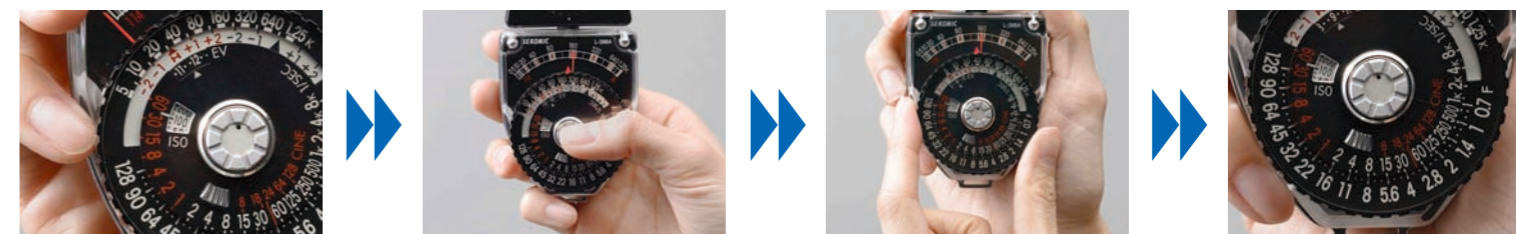

- STEP 1**  
Use Film sensitivity knob to set ISO sensitivity.
- STEP 2**  
Press Stopper button (Measuring button). When the needle becomes stable, release the stopper button.
- STEP 3**  
Read the foot-candle indication of the meter needle. Transfer footcandle value to the dial scale and rotate the dial ring and set the scale mark.
- STEP 4**  
At this time, you can select the combination of shutter speed and aperture to determine an exposure.



### Slide set for L-398 series(Optional accessory)

This accessory enables you to read aperture directly. Select the slide according to the combination of ISO sensitivity and shutter speed, and insert it to the head of L-398A to read directly the aperture value indicated by the needle.

### Specification

Measuring system	Incident and reflected for ambient light
Measuring range	EV4 to 17 (for incident light)
(ISO100)	EV9 to 17 (for reflected light)
ISO speed	ISO 6 to 12,000 in 1/3 step
f/stop	f0.7 to 128 in 1/3 step
Shutter speed	60sec. to 1/8000sec.
Cine speed	8, 18, 24, 64 and 128 f/s
Foot-candle scale	0 to 1250 FC
Weight	190g (6.7oz.)
Dimension	58(W) x 112(H) x 34(D) mm

<Note> Specifications subject to change without notice.

## SEKONIC CORPORATION

7-24-14, OIZUMI-GAKUEN-CHO, NERIMA-KU, TOKYO, 178-8686, JAPAN  
 TEL. ++81-3-3978-2335 FAX. ++81-3-3978-5229  
<http://www.sekonic.co.jp>